

LED Strobe Beacon | Oval FLASHING AMBER WARNING LIGHT



23 built-in flash patterns.



Feature

- 12 - 24Vdc
- 23 built-in flash patterns
- Multiple unit synchronization
- Low profile design
- Permanent mount or magnetic mount



Benefit

Use on pick-up trucks, cars or heavy duty vehicles.
Highly visible, multiple configurations with up to 360° of lighting.
Enhance visibility further with coordinated flash patterns.
Provides more stability, better weight distribution and saves fuel.
Allows for options to leave on, or switch between fleet vehicles.

Specifications

Operating Voltage:	12 - 24Vdc
Operating Current:	2.1A @ 12Vdc (varies with flash pattern) 1.0A @ 24Vdc (varies with flash pattern)
Max Current:	4.2A @ 12Vdc 2.1A @ 24Vdc
Power Consumption:	25W
Max Power Consumption:	50W
Temperature Range:	-50°C to +60°C
Ingress Protection:	IP69K
Weight:	2.8lbs (1.3kg)
Housing:	Black ABS
Lens:	Polycarbonate
Connection:	Permanent Mount: Wire Leads Magnetic Mount: 12Vdc Plug
Mounting:	Permanent or Magnetic
LEDs:	30
Colour:	Amber
Fuse Recommended:	8A
Compliance:	SAE J845 Class 1 CA Title 13



Flash Pattern

Flash Pattern

0	Random
1	Rotating
2	Single (Split)
3	Double (Split)
4	Quad (Split)
5	Quint (Split)
6	Mega (Split)
7	Ultra (Split)
8	Single - Quad (Split)
9	Single H / L (Split)
10	Single (All)
11	Double (All)
12	Quad (All)
13	Quint (All)
14	Mega (All)
15	Ultra (All)
16	Single - Quad (All)
17	Single H / L (All)
18	Steady 2 (California)
19	Single (2Hz)
20	Double (2Hz)
21	Triple (2Hz)
22	Quad (2Hz)

Part #	Description	Operating Voltage
--------	-------------	-------------------

81542	LED Strobe Beacon Permanent Mount	12 - 24Vdc
81543	LED Strobe Beacon Magnetic Mount with 2 Switch 12Vdc Plug	12Vdc

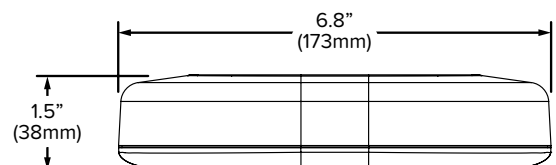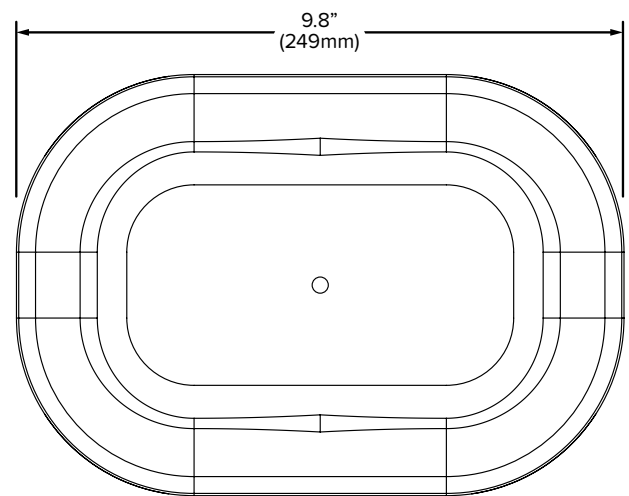

For more lighting and electronic solutions,
please check out our catalogue.