

XTL-810 Series COMPACT LED WORK LIGHT | 1260 LUMENS



“2 Lives in 1” Mount System

If one attachment point fails due to a collision, rotate to the next channel point and re-mount the light.



ENHANCED
BEZEL

Enhanced bezel styling with added lens protection.

Delivers 1260 lumens of bright white illumination.



Feature

- Die cast aluminum housing, polycarbonate lens and high impact bezel
- IP68 & IP69K
- Low current draw
- Constant current circuit draw
- 3 beam patterns
- 50,000+ hours LED service life



Benefit

- Virtually unbreakable.
- Will withstand dust, dirt, sand, and water submersion.
- Energy efficient, save on fuel costs.
- Light does not dim even if voltage fluctuates.
- Get light where it's needed most.
- Long lasting investment, quality product.

Specifications

Operating Voltage:	12 - 24Vdc
Operating Current:	1.2A @ 12Vdc 0.6A @ 24Vdc
Power Consumption:	14W
Temperature Range:	-40°C to +80°C
Ingress Protection:	IP68 & IP69K
Weight:	1.3lbs (0.6kg)
Housing:	Die Cast Aluminum Alloy A380 Black E-Coat
Lens:	Automotive Optical Grade Hard-Coated Polycarbonate
Connection:	6" Wire
Polarity:	Reverse Voltage Protected
Vibration Resistance:	10-500Hz @ 5Grms
Mounting:	C-Bracket (Powder Coated Steel) Swivel Bracket (Zinc Dichromate Plating)
EMC Rated:	EMC EN 13309: 2010



Part #	Beam Pattern	Lumens	Operating Voltage
81871/B	Spot	1260	12 - 24Vdc
81873/B	Medium Flood	1260	12 - 24Vdc
81874/B	Hybrid	1260	12 - 24Vdc

Swivel Bracket


81875/B	Spot	1260	12 - 24Vdc
81877/B	Medium Flood	1260	12 - 24Vdc
81878/B	Hybrid	1260	12 - 24Vdc

Accessories

HW02A	Hardware Kit C-Bracket
98189	Hardware Kit Swivel Bracket

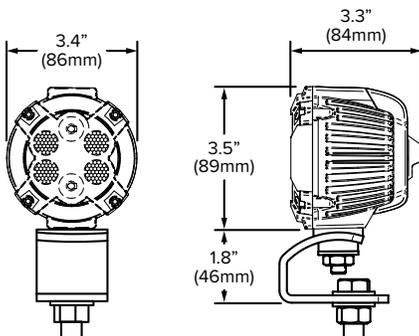


C-Bracket




Swivel Bracket

Beam Patterns


Spot Pattern

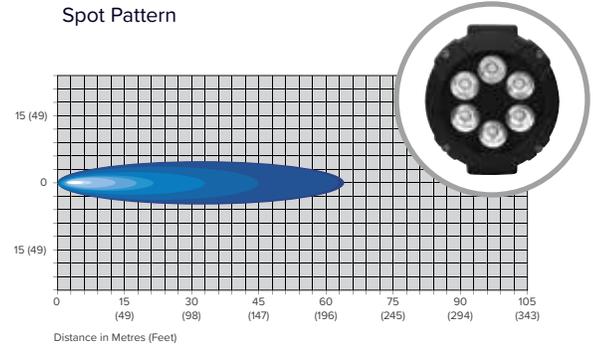

Medium Flood Pattern

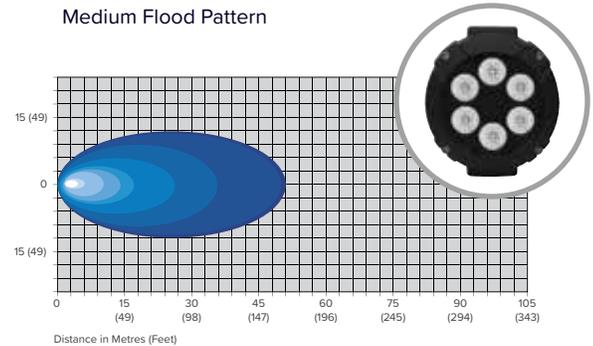

Hybrid Pattern

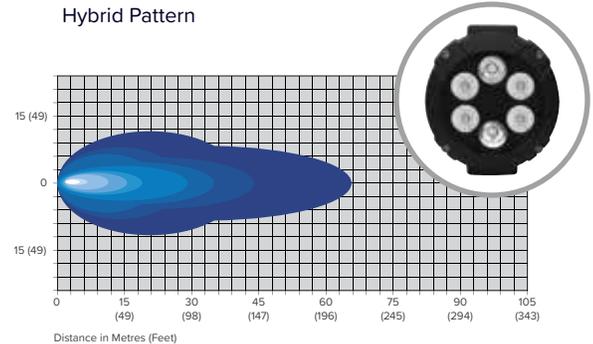

For more lighting and electronic solutions, please check out our catalogue.