

# LED Strobe Beacon | Rectangular FLASHING AMBER WARNING LIGHT



**19 built-in flash patterns.**



## Feature

- 19 built-in flash patterns
- Multiple unit synchronization
- Low profile design
- Permanent mount or magnetic mount



## Benefit

Highly visible, multiple configurations with up to 360° of lighting. Enhance visibility further with coordinated flash patterns. Provides more stability, better weight distribution and saves fuel. Allows for options to leave on, or switch between fleet vehicles.

### Specifications

Operating Voltage:	12Vdc
Operating Current:	1.6A @ 12Vdc (varies with flash pattern)
Max Current:	3.2A @ 12Vdc
Power Consumption:	19W
Max Power Consumption:	38W
Temperature Range:	-50°C to +60°C
Ingress Protection:	IP69K
Weight:	3.4lbs (1.5kg)
Housing:	Black ABS
Lens:	Polycarbonate
Connection:	Permanent Mount: Wire Leads Magnetic Mount: 12Vdc Plug
Mounting:	Permanent or Magnetic
LEDs:	18
Colour:	Amber
Fuse Recommended:	8A
Compliance:	SAE J845 Class 1   CA Title 13



### Flash Pattern #

### Flash Pattern

0	Random (All)
1	Single (Split)
2	Double (Split)
3	Quad (Split)
4	Quint (Split)
5	Mega (Split)
6	Ultra (Split)
7	Single - Quad (Split)
8	Single H / L (Split)
9	Single (All)
10	Double (All)
11	Quad (All)
12	Quint (All)
13	Mega (All)
14	Ultra (All)
15	Single - Quad (All)
16	Single H / L (All)
17	Steady 2 (California)
18	Steady 4 (All)

Part #	Description	Operating Voltage
--------	-------------	-------------------

81544	LED Strobe Beacon Permanent Mount	12Vdc
81545	LED Strobe Beacon Magnetic Mount with 2 Switch 12Vdc Plug	12Vdc

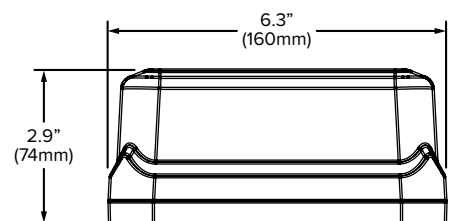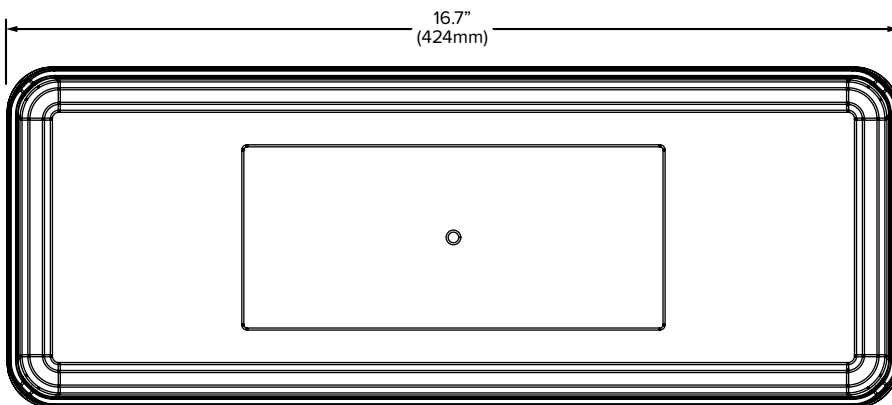

For more lighting and electronic solutions, please check out our catalogue.