

Used throughout North America on commercial vehicles.



Feature

- Long life
- Meets SAE back up requirements as a single light
- Power 6W (12Vdc)



Benefit

60,000 hours of continuous operation.

System cost savings.

80% improvement over incandescent equivalent light.





Specifications

Operating Voltage: 12Vdc

Operating Current: 0.5A @ 12Vdc

Power Consumption: 6W

Light Source: Long Lifespan Cool White LED | 4 LED

Mounting: Flush Mount Version: Direct Replacement

to Incandescent BoC Lights

Surface Mount Version: Minimize Required

Cutout for Light Installation

Over Voltage: Regulated Output to 16Vdc

Protection to SAE J1455


Connection: Integral Sealed Connector or

OEM Specific Pigtail with Connector

Wire Harness: 6.5" (165mm)

Mating Connector: Delphi #120662214

Part	t #	Beam Pattern	Lumens	Operating Voltage
8108	32	Flood	400	12Vdc

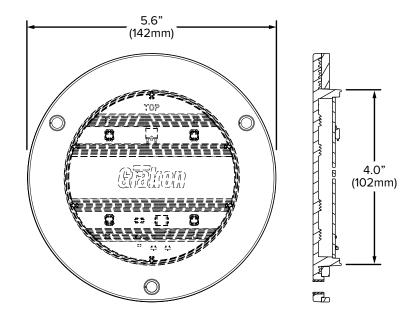



For more lighting and electronic solutions, please check out our catalogue.

